


FOBRO Oscillator side Lifter/Shaker

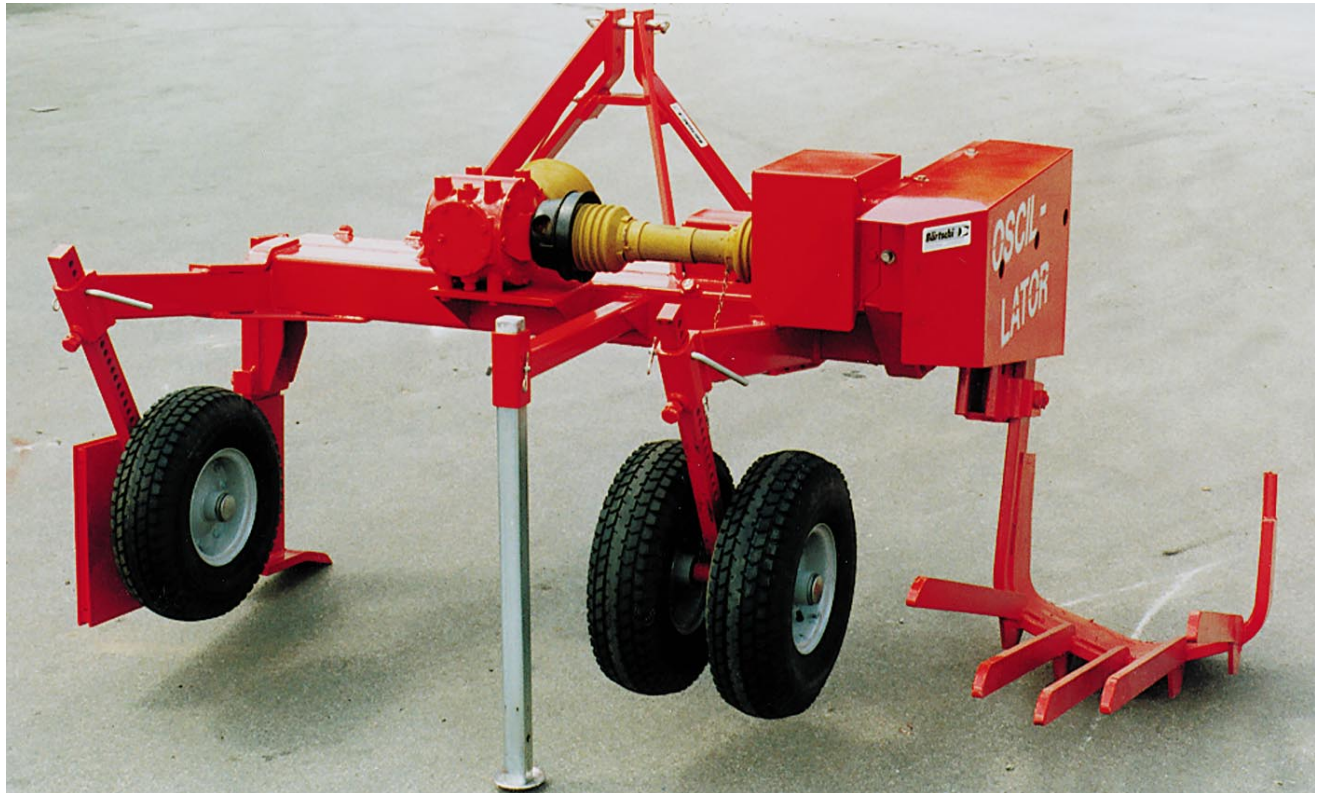

Technical Information

FOBRO Oscillator side lifter/shaker

working width	inner share width is 55 cm / 21,6"
working depth	maximum 50 cm / 19,7"
machine width	adjustable from 3 m to 3,5 m / 118"-138" (outside width)
wheel track	not important, max. 3 m tractor outside width (118")
clearance	no limit
weight	990 kg / 2138 lbs.
horsepower required	tractors with 2-wheel drive > 90 HP tractors with 4-wheel drive > 70 HP
P.T.O shaft	540 or 1000 rpm working rpm: 400-500

FOBRO Oscillator, the side lifter/shaker for high stem trees. This machine is built for heavy duty purposes and proves its quality in the daily use in big and small nurseries since more than 10 years.

Any bareroot stock grown in rows is lifted gently with a minimum use of power.

Bärtschi-FOBRO



FOBRO Oscillator side Lifter/Shaker

Standard equipment

In driving direction oscillating undercutter blade with lifting/shaking bars

Your advantage

Less traction or horsepower needed, the blade cuts itself through the ground. The side drag is reduced to a minimum. The soil is not scooped up and compacted as with rigid blades. Therefore you harvest more of the roots.

More roots = better quality = satisfied customers = better price = more profit!

Integrated shaker

This ensures a gentle and soil free lifting of the plants.

Adjustable shaking action

In wet and muddy conditions, this increases fracturing of heavy/cloddy soils.

Stabilizing blade

Ensures the ability to balance the drag generated on the opposite mounted lifter/shaker u-blade.

Adjustable side digging blade

Both sides of the Oscillator are adjustable to allow the digging blade to clear a dual-wheel tractor and assure precise tracking.

Three adjustable wheels

A single and on the lifting side a dual-wheel help to maintain the exact working depth.

Heavy flywheel

Provides smooth operation.

Replaceable wear-blades

Less maintenance cost.

Optional equipment

Your advantage

Root pruning blade

In driving direction cutting root pruning blade provides a clean cut, harming of the plants is reduced to a minimum. No drag or build-up of uncut roots on the blade.

Bärtschi-FOBRO AG

Bernstrasse 26 | P.O. Box 1 | CH-6152 Hüswil/Switzerland

Telephone: --41 (0) 41 988 21 21 | Fax: --41 (0) 41 988 22 86

www.fobro.com | e-mail: info@fobro.com

98-09-001 We reserve the right to make technical corrections and product improvements anytime.

Bärtschi-FOBRO

